


CE-65 BiSS Interface

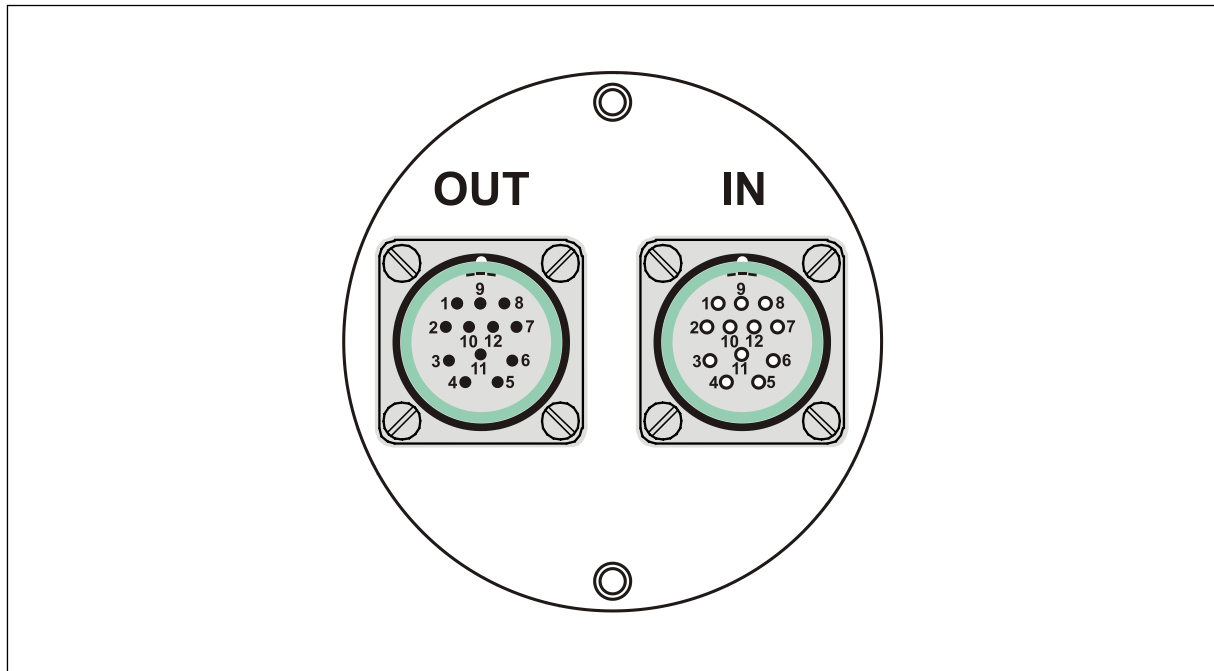

PIN	Flanschdose / Female socket, (12 pol.)	
1	Master Clock-Signal -	IN
2	Master Clock-Signal +	
3	Slave Data-Signal +	
4	Slave Data-Signal -	
5 - 10	N.C.	
11	11 - 27 VDC	
12	GND, 0V	

PIN	Flanschstecker / Male socket, (12 pol.)	
1	Master Clock-Signal -	OUT
2	Master Clock-Signal +	
3	Slave Data-Signal +	
4	Slave Data-Signal -	
5 - 10	N.C.	
11	11 - 27 VDC	
12	GND, 0V	

SensDatLength = 24
 Data format = Gray
 4096 / 4096