


Steckerbelegung / Pin assignment CDV-115

Encoder 1 SSI + Incremental / Encoder 2 SSI + Incremental

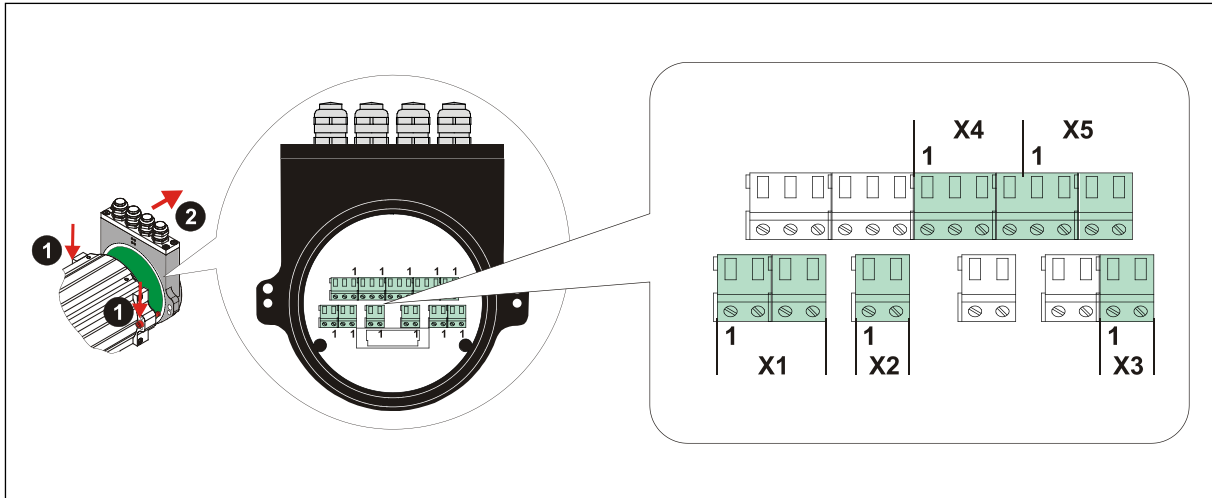

X1	Versorgungsspannung / <i>Supply voltage</i>	
Pin 1	0V	Heizung / <i>Heating</i>
Pin 2	11 – 27 V DC	
Pin 3	11 – 27 V DC	Encoder 1 / Encoder 2
Pin 4	GND, 0V	

X2	Preset-Eingänge / <i>Preset inputs</i>	
Pin 1	Preset_IN, 11 – 27 V DC	Encoder 2

X3	Programmier-Schnittstelle / <i>Programming interface</i>	
Pin 1	RS485 – (TRWinProg)	Encoder 2
Pin 2	RS485 + (TRWinProg)	

X4	Inkremental-Signale / <i>Incremental signals</i>	
Pin 1	K1 +_OUT, RS422 / 11 – 27 V DC	Encoder 2 Pegel siehe Typenschild / <i>Level see nameplate</i>
Pin 2	K2 +_OUT, RS422 / 11 – 27 V DC	
Pin 3	K1 –_OUT, RS422 / 11 – 27 V DC	
Pin 4	K2 –_OUT, RS422 / 11 – 27 V DC	

X5	SSI-Schnittstelle / <i>SSI interface</i>	
Pin 1	Clock +_IN	Encoder 2
Pin 2	Clock –_IN	
Pin 3	Data +_OUT	
Pin 4	Data –_OUT	