

Connector pin assignment CAN-BUS Encoder (Device-Net-Profile)

X1 - screw clamp 2-pin

- Pin 1 CAN_US (internal not connect)
- Pin 2 CAN_GND

X2 - screw clamp 2-pin

- Pin 1 CAN_H
- Pin 2 CAN_L

X3 - screw clamp 2-pin

- Pin 1 screening
- Pin 2 screening

X4 - screw clamp 2-pin


- Pin 1 CAN_L
- Pin 2 CAN_H

X5 - screw clamp 2-pin

- Pin 1 CAN_GND
- Pin 2 CAN_US (internal not connect)

X6 - screw clamp 2-pin

- Pin 1 US, supply voltage 11 - 27 V DC
- Pin 2 GND, supply voltage 0 V

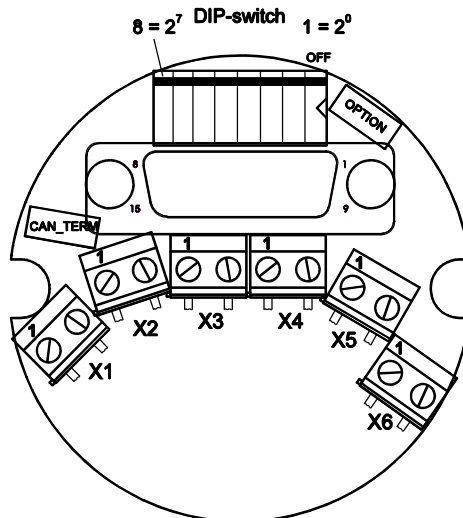

LED off	Encoder is not on-line - No Dup_MAC_ID-test - Device may not be powered
green	On-line, with connections in the established state - Device is allocated to a master
green flashing	Device is operating in a normal condition - It has passed the Dup-MAC-ID test, is on-line, no established connections to other nodes - Device is not allocated to a master
red flashing	Recoverable fault - I/O-connections are in the timed-out state
red	Replace encoder

Identifier

DIP-switch 6 = identifier 2 ⁵	DIP-switch 5 = identifier 2 ⁴	DIP-switch 4 = identifier 2 ³	DIP-switch 3 = identifier 2 ²	DIP-switch 2 = identifier 2 ¹	DIP-switch 1 = identifier 2 ⁰	Encoder address = identifier
off	off	off	off	off	off	0
off	off	off	off	off	on	1
off	off	off	off	on	off	2
off	off	off	off	on	on	3
.
on	on	on	on	on	off	62
on	on	on	on	on	on	63

Baud rate

DIP-switch 8	DIP-switch 7	Baud rate
off	off	125 kbps
off	on	250 kbps
on	off	500 kbps

CAN-TERMINATOR

	TERMINATOR ON	TERMINATOR OFF
Terminating impedance	YES 123 Ω between CAN_L and CAN_H	NO