

Pin assignment

Connector pin assignment CAN-BUS Encoder (DeviceNet™ Profile)

Print clamps: 2-pole, grid spacing 5,08 mm, nominal cross-section 0,14-1,5 mm² (fixed or flexible), nominal voltage 250 V, rated current 16 A, AWG 26-16

X1 - screw clamp 2-pin

Pin 1 CAN_US
Pin 2 CAN_GND

X2 - screw clamp 2-pin

Pin 1 CAN_H
Pin 2 CAN_L

X3 - screw clamp 2-pin


Pin 1 Drain / Shield
Pin 2 Drain / Shield

X4 - screw clamp 2-pin

Pin 1 CAN_L
Pin 2 CAN_H

X5 - screw clamp 2-pin

Pin 1 CAN_GND
Pin 2 CAN_US

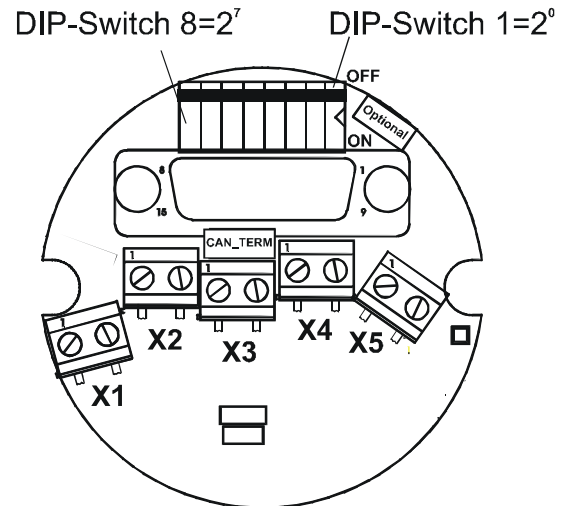

LED off	Encoder is not on-line - No Dup_MAC_ID-test - Device may not be powered
green	On-line, with connections in the established state - Device is allocated to a master
green flashing	Dup-MAC-ID test successful Device is not allocated to a master
red flashing	Recoverable fault - e.g. I/O-connections are in the timed-out state
red	- Turn off system, after that turn on system - Replace encoder

Identifier

DIP-switch 6 = identifier 2 ⁵	DIP-switch 5 = identifier 2 ⁴	DIP-switch 4 = identifier 2 ³	DIP-switch 3 = identifier 2 ²	DIP-switch 2 = identifier 2 ¹	DIP-switch 1 = identifier 2 ⁰	Encoder address = identifier
off	off	off	off	off	off	0
off	off	off	off	off	on	1
off	off	off	off	on	off	2
:	:	:	:	:	:	:
on	on	on	on	on	off	62
on	on	on	on	on	on	63

Baud rate

DIP-switch 8	DIP-switch 7	Baud rate
off	off	125 kbps
off	on	250 kbps
on	off	500 kbps

CAN-TERMINATOR

	TERMINATOR: ON	TERMINATOR: OFF
Terminating impedance	YES: 121 Ω between CAN_L and CAN_H	NO