


LP-38 CAN-BUS / TR

Pin assignment 6-pole Binder


- Pin 1 CAN_L
- Pin 2 CAN_H
- Pin 3 CAN_GND
- Pin 4 CAN_R
- Pin 5 US, 19 - 27 V DC
- Pin 6 0V, GND



Note:

A bus terminal resistor of 120 ohms can be switched on by connection of pin 4 = CAN_R with pin 2 = CAN_H.

Switches

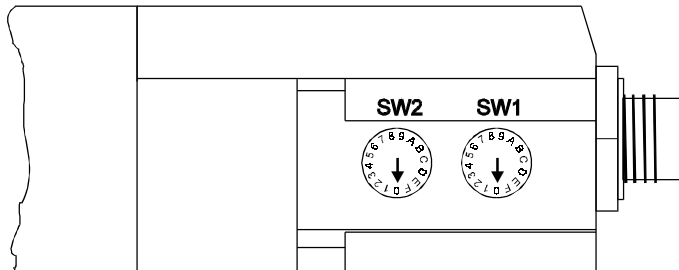

LED Status

- green: ready-to-operate
- red: no magnet detected

SW2				SW1			
2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
Baud rate				Identifier			

Switch SW2	Baud rate BIT 6 +7 (SW2)	Identifier BIT 4 + 5 (SW2)
0	500 kBaud	0
1	500 kBaud	1
2	500 kBaud	2
3	500 kBaud	3
4	250 kBaud	0
5	250 kBaud	1
6	250 kBaud	2
7	250 kBaud	3
8	125 kBaud	0
9	125 kBaud	1
A	125 kBaud	2
B	125 kBaud	3
C	20 kBaud	0
D	20 kBaud	1
E	20 kBaud	2
F	20 kBaud	3