


LA-41 CAN-BUS / Open

Pin assignment 6-pole Binder


- Pin 1 CAN_L
- Pin 2 CAN_H
- Pin 3 CAN_GND
- Pin 4 CAN_R
- Pin 5 US, 19 - 27 V DC
- Pin 6 0V, GND



Note:

A bus terminal resistor of 120 ohms can be switched on by connection of pin 4 = CAN_R with pin 2 = CAN_H.

Switches

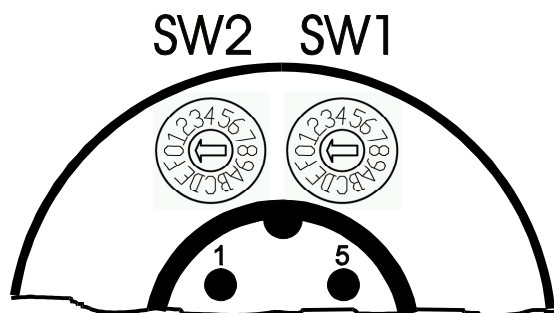

| SW2 | | | | SW1 | | | |
|-----------|-------|-------|-------|------------|-------|-------|-------|
| 2^7 | 2^6 | 2^5 | 2^4 | 2^3 | 2^2 | 2^1 | 2^0 |
| Baud rate | | | | Identifier | | | |

| Switch SW2 | Baud rate BIT 6 +7 (SW2) | Identifier BIT 4 + 5 (SW2) |
|---------------|-----------------------------|-------------------------------|
| 0 | 20 kBaud | 0 |
| 1 | 20 kBaud | 1 |
| 2 | 20 kBaud | 2 |
| 3 | 20 kBaud | 3 |
| 4 | 125 kBaud | 0 |
| 5 | 125 kBaud | 1 |
| 6 | 125 kBaud | 2 |
| 7 | 125 kBaud | 3 |
| 8 | 500 kBaud | 0 |
| 9 | 500 kBaud | 1 |
| A | 500 kBaud | 2 |
| B | 500 kBaud | 3 |
| C | 1 MBaud | 0 |
| D | 1 MBaud | 1 |
| E | 1 MBaud | 2 |
| F | 1 MBaud | 3 |

Identifier = switch value + 1