


## Steckerbelegung / Pin assignment

### MP-200-CO... (Kabelabgang / Cable outlet)

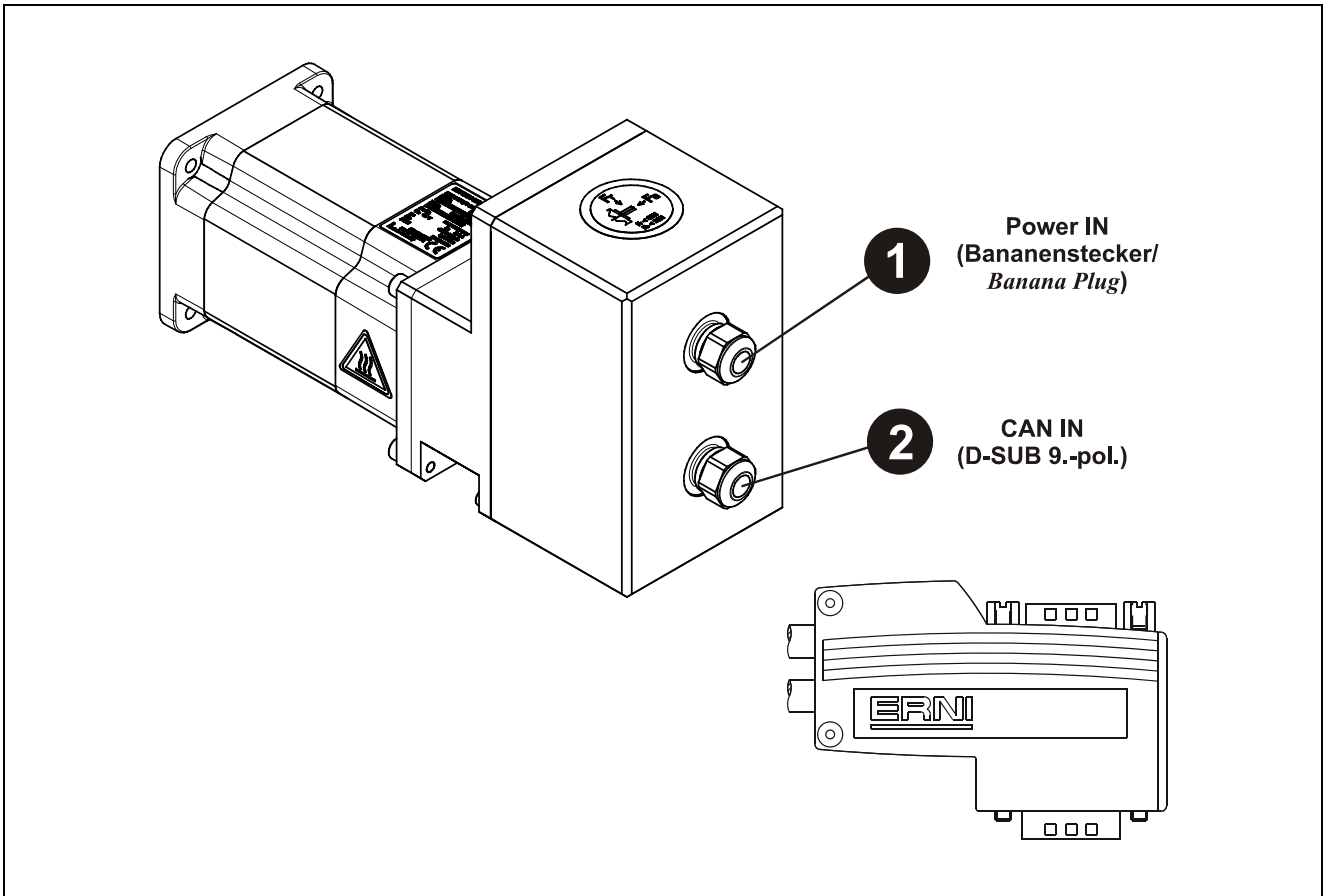

1 Bananenstecker / Banana plug			
1	+24 V DC	rot / red	Logic IN (Electronic)
2	0 V	schwarz / black	Gemeinsame Masse / Common Ground
3	+24 V DC ... +48 V DC	rot / red	Power IN

2 Buchse / Female Connector (D-SUB 9 pol.)		
1	N.C.	CAN IN
2	CAN_L	
3	N.C.	
4	N.C.	
5	Shield	
6	N.C.	
7	CAN_H	
8	N.C.	
9	N.C.	

