


Multi-Module PT-100 Art.-No. 490-00103

Application

The multi-module PT-100 is used for the programming of max. 5 measuring systems. The connection of the PT Data + and – for each measuring system occurs over a 2-pole terminal block. The voltage supply for the programming terminal is fed over the 15-pole SUB-D connector (X1) positioned on the side. In order to cascade further multi-modules, the right 15-pole SUB-D socket (X7) can be used.

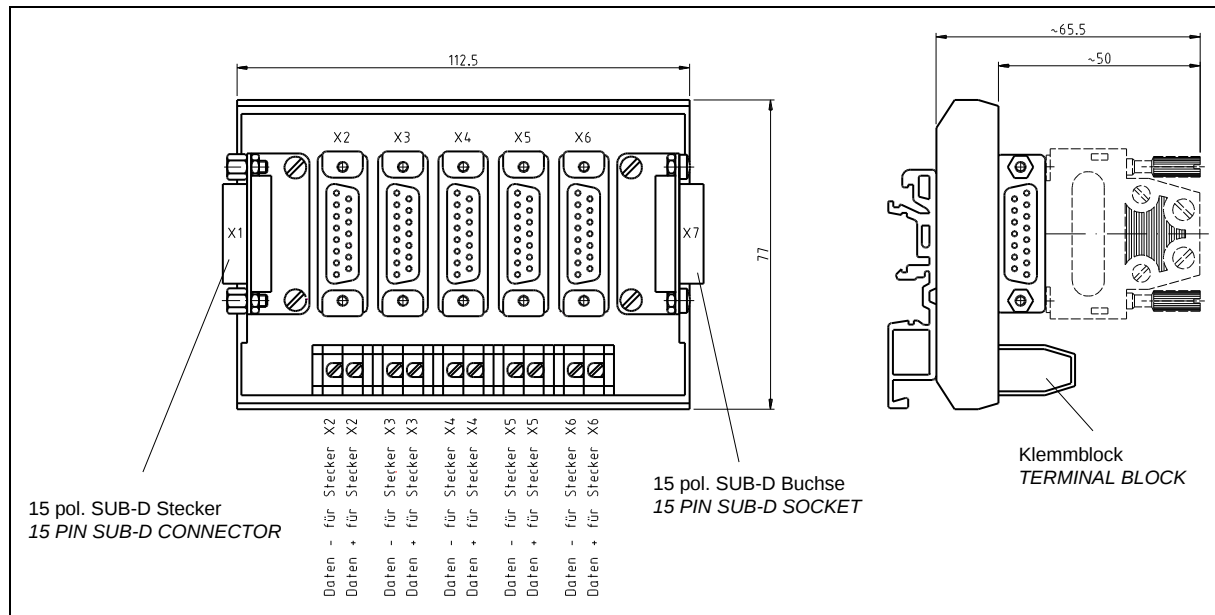

Pin assignment

X1	X2	X3	X4	X5	X6	X7
-	1 PT -	1 PT -	1 PT -	1 PT -	1 PT -	-
-	2 PT +	2 PT +	2 PT +	2 PT +	2 PT +	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
14 US 11-27V	14 US 11-27V	14 US 11-27V	14 US 11-27V	14 US 11-27V	14 US 11-27V	14 US 11-27V
15 0V, GND	15 0V, GND	15 0V, GND	15 0V, GND	15 0V, GND	15 0V, GND	15 0V, GND

Technical Information

Connection example

