


LA-41 / LA-65-H CAN DeviceNet

Pin assignment 6-pole Binder


- Pin 1 CAN_L
- Pin 2 CAN_H
- Pin 3 CAN_GND
- Pin 4 CAN_R
- Pin 5 US, 19 - 27 V DC
- Pin 6 0V, GND



Note:

A bus terminal resistor of 120 ohms can be switched on by connection of pin 4 = CAN_R with pin 2 = CAN_H.

Switches

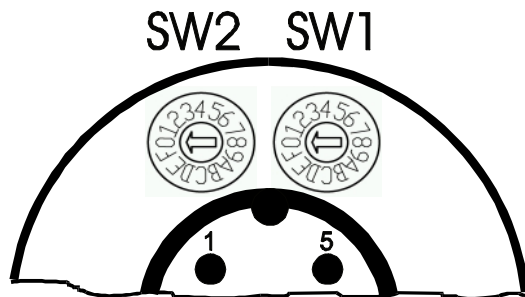

SW2				SW1			
2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0
Baud rate			MAC-ID				

Switch	Baud rate	MAC-ID
SW2	BIT 2 +3 (SW2)	BIT 0 + 1 (SW2)
0	125 kBaud	0
1	125 kBaud	1
2	125 kBaud	2
3	125 kBaud	3
4	250 kBaud	0
5	250 kBaud	1
6	250 kBaud	2
7	250 kBaud	3
8	500 kBaud	0
9	500 kBaud	1
A	500 kBaud	2
B	500 kBaud	3
C	-	0
D	-	1
E	-	2
F	-	3