



## LA-41 / LA-65-H CAN DeviceNet

### Pin assignment 5-pol. Micro-Style-Connector

- Pin 1 Shielding
- Pin 2 CAN\_US (V+)
- Pin 3 CAN\_GND (V-)
- Pin 4 CAN\_H
- Pin 5 CAN\_L



### Switch

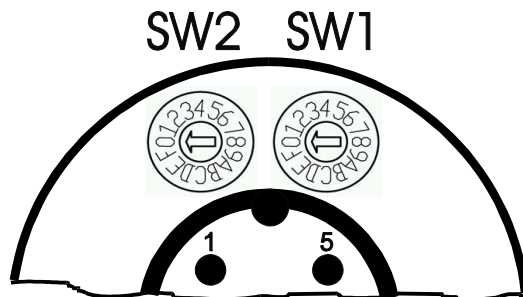

SW2				SW1			
$2^7$	$2^6$	$2^5$	$2^4$	$2^3$	$2^2$	$2^1$	$2^0$
Baud rate				MAC-ID			

Switch SW2	Baud rate BIT 2 +3 (SW2)	MAC-ID BIT 0 + 1 (SW2)
0	125 kBaud	0
1	125 kBaud	1
2	125 kBaud	2
3	125 kBaud	3
4	250 kBaud	0
5	250 kBaud	1
6	250 kBaud	2
7	250 kBaud	3
8	500 kBaud	0
9	500 kBaud	1
A	500 kBaud	2
B	500 kBaud	3
C	-	0
D	-	1
E	-	2
F	-	3