

MIPC-H



- Industrial approved components
- Ideal for hard environments / Solid & robust
- IP65 front side
- Floating suspension between chassis & mounting / Shock & vibration approved
- Modular system
- Frontside: Floppy, LPT, PS/2-Mouse/Keyboard, COM
- Easy accessibility to integrated components
- Active Fan and temperature control with 2 floating outputs



Technical data

Display	264 mm (10.4") TFT Active Matrix, 200 cd/m ²
Resolution	800 x 600 or 640 x 480
Touch screen	not available
Slot CPU Module	starting up from VIA [®] Mark 800 MHz, Intel [®] Atom™ N270 1.6 GHz up to Intel [®] Core™ 2 Duo 2.2 GHz T7500
Memory	up to 2 GByte
Hard disk	min. 40 GByte (industrial grade 24/7), optional flash disk
Drives	floppy 1.44 MB
Standard interfaces	COM, LPT, PS/2 mouse and keyboard, Ethernet 10/100 Base-T, VGA D-Sub 15 pol., USB
Monitoring functions	temperature, Watchdog, Status LEDs
Backplane types	different versions possible, (e.g. PCI/ ISA/ PISA)
Pre-installed operating system	on customer's request

Electrical data

Power supply	120/ 240 VAC, optional 24 VDC
Power consumption	depends on construction

Environmental conditions

EMI	DIN EN 61000-6-2: 2006; generic standards – Immunity for industrial environments
.....	DIN EN 61000-6-4: 2007; generic standards – Emission standard for industrial environments
Operating temperature [°C]	0 ... +50/ Intel [®] Core™ 2 Duo 2.2 GHz types 0 ... +45
Storage temperature [°C]	-20 ... +60
Humidity (rel. %)	90 (non condensing)

Dimension


Dimension in mm (W/H)	334 x 504
Cut-out size in mm (W/H)	315.5 x 475
Deepness in mm	181
Weight in kg	16

Customized configurations on request!

TRsystems GmbH, Eglshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.trsystems.de, info@trsystems.de

MIPC-H

Drawing

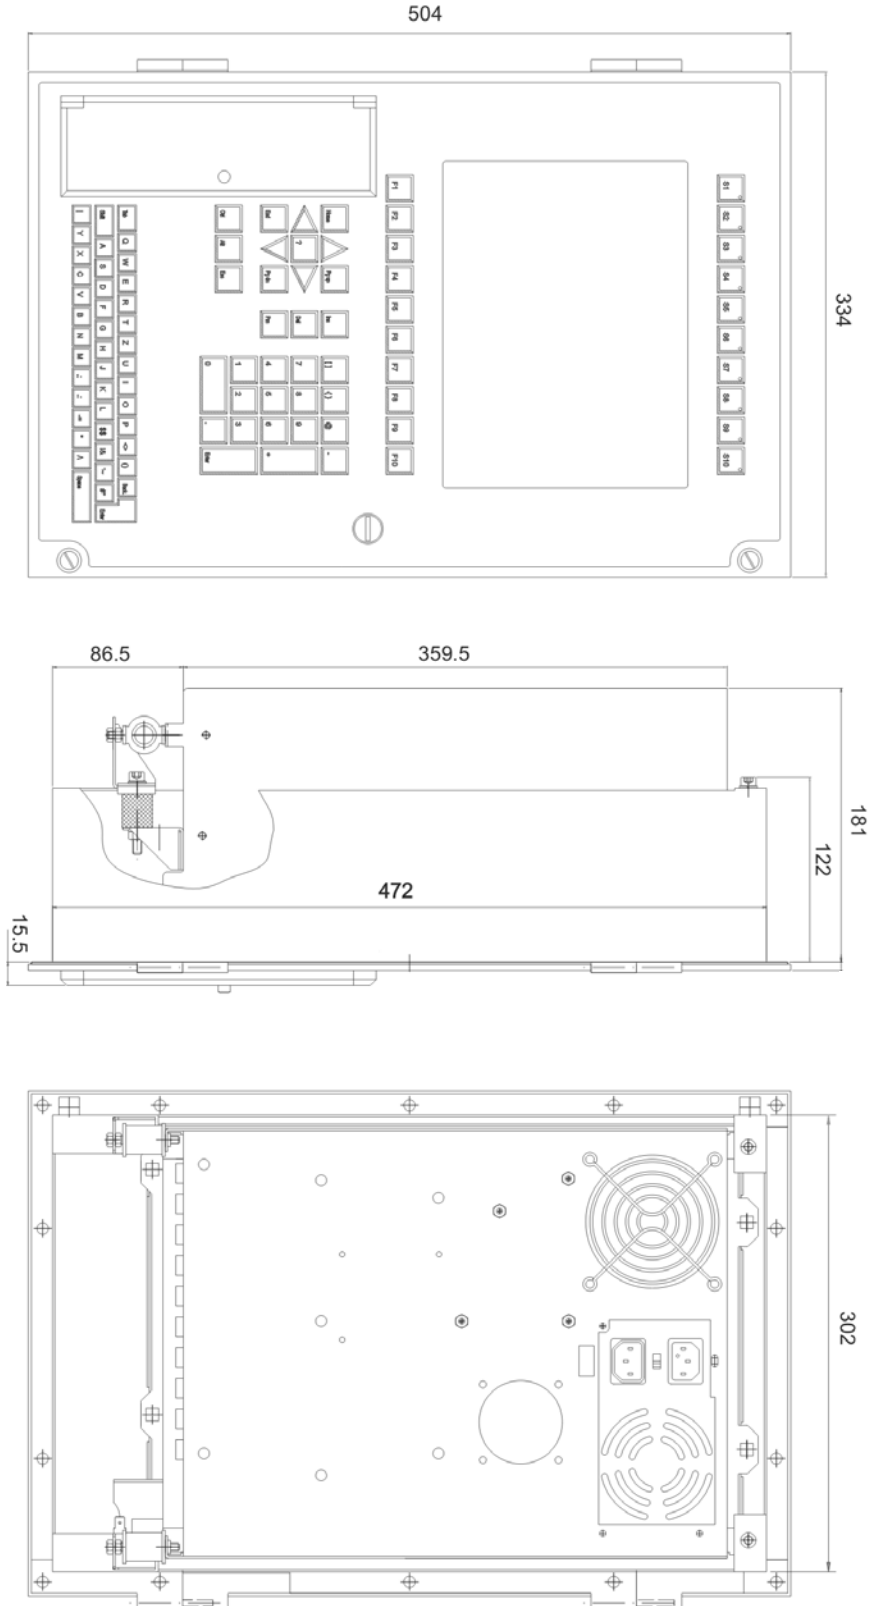

TRsystems GmbH, Eglisshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.trsystems.de, info@trsystems.de