


# MCC-W



- Wall fastening kit
- Industrial approved components ideal for hard environment / solid & robust
- Scalable slot CPU modules
- Modular system
- Increased security due to optional UPS
- Optional active fan and temperature control with 2 floating outputs
- Expandable with e.g. DeviceNet, Profibus and other add on cards

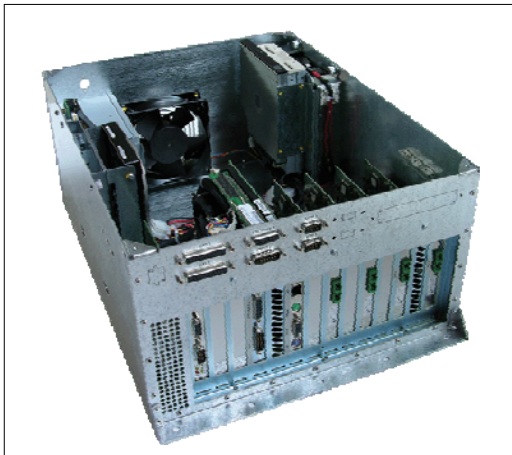

**Technical data**

Slot CPU Module (with passive backplane) Intel® Atom™ N270 1.6 GHz / D525/ Core™2 Duo 2.2 GHz  
 or Mainboard..... On request

Resolution.....2048 x 1536 pixel  
 Memory..... Up to 2 GByte  
 Hard disk..... Min. 250 GByte S-ATA, (industrial grade 24/7), optional flash disk  
 Drives..... CD/DVD-ROM, CD/DVD-RW, floppy  
 Standard interfaces..... COM, LPT, PS/2 mouse and keyboard, Ethernet 10/100 Base-T, VGA, USB  
 Monitoring functions..... Fan, temperature, Watchdog  
 Backplane..... 14 slots, different versions possible (e.g.: PCI/ ISA/ PISA)  
 Pre-installed operating system..... On customer's request (Windows / Linux)

**Electrical data**

Power supply ..... 100-240 VAC, optional 24 VDC  
 UPS (Uninterruptible Power Supply) ..... Rechargeable battery pack 24 VDC (2.2 Ah)  
 Power consumption ..... Depends on construction

**Environmental conditions**

EMI ..... DIN EN 61000-6-2: 2006; Generic standards – immunity for industrial environments  
 ..... DIN EN 61000-6-4: 2007; Generic standards – immunity for industrial environments  
 Operating temperature [°C]..... 0 ... +50/ Intel® Pentium® 4 and Intel® Core™ 2 Duo 2.2 GHz types 0 ... +45  
 Storage temperature [°C]..... -20 ... +60  
 Humidity (rel. %) ..... 90 (non condensing)

**Dimension**


Size in mm (W/H/D) ..... 490 x 354 x 218.9 (19" Rack), 4 HE  
 Weight in kg ..... 10

**Customized configurations on request!**

TRsystems GmbH, Eglisshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.trsystems.de, info@trsystems.de

### MCC-W

#### Maßzeichnung

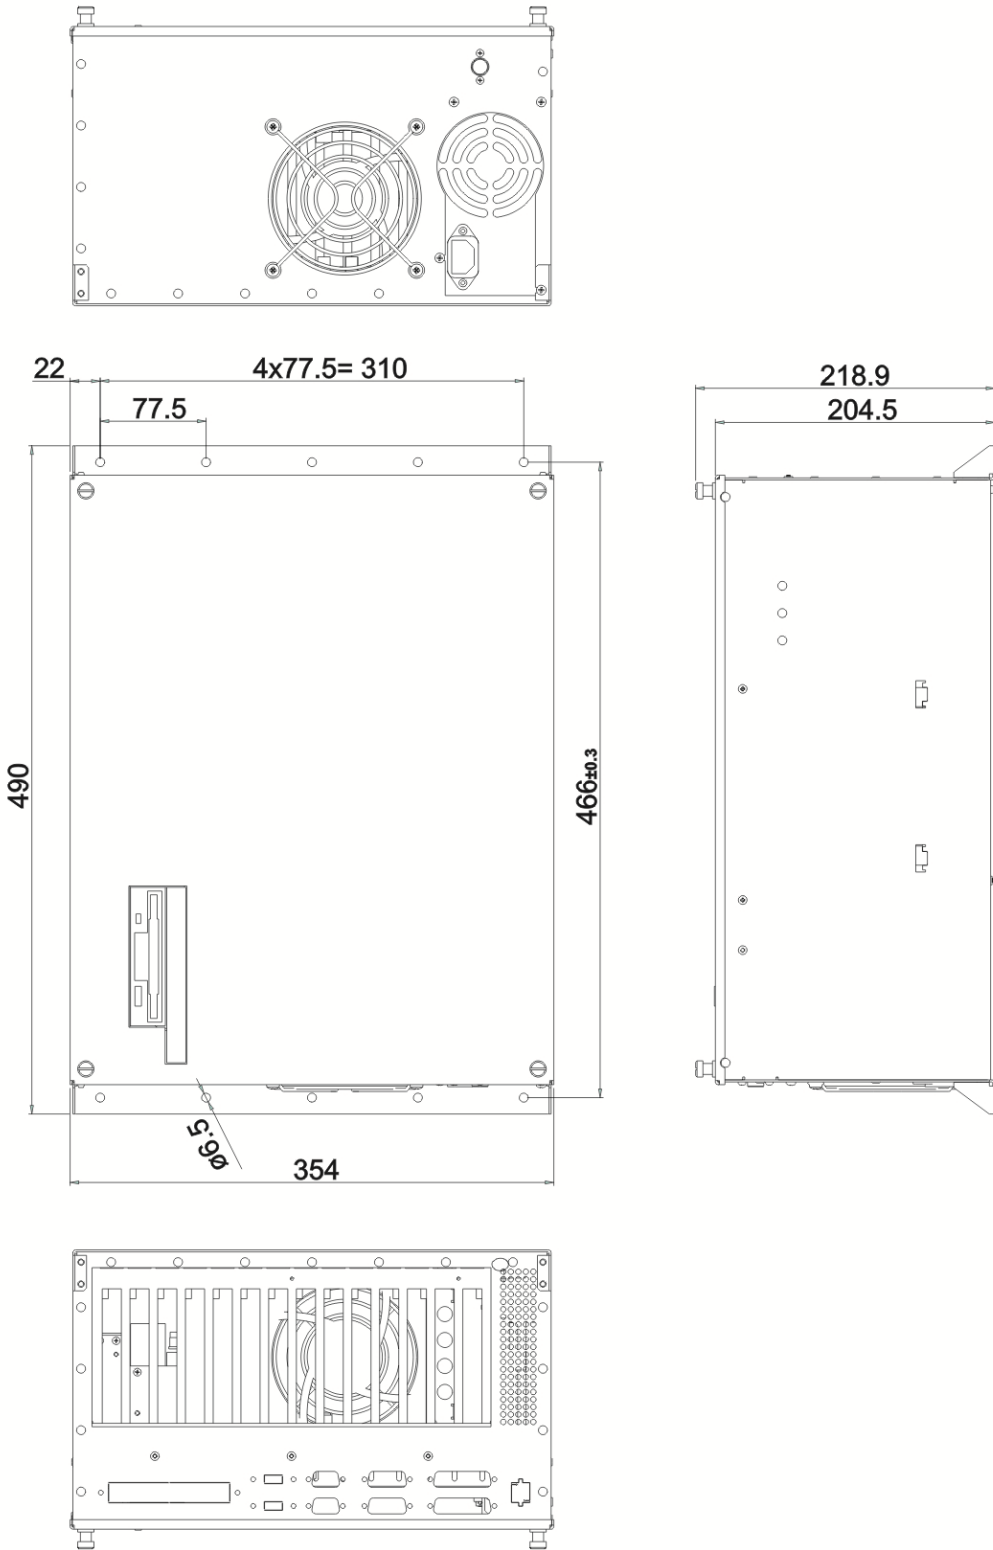

TRsystems GmbH, Eglshalde 16, 78647 Trossingen, Tel.: +49 (0) 7425 228-0, Fax: +49 (0) 7425 228-34, www.trsystems.de, info@trsystems.de